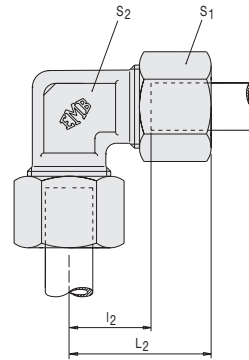

Equal Elbows

Coudes égaux
**Winkel-
Verschraubungen**

Bestellzeichen: F

Rohr-AD 4-12 mm = Profilmaterial

order code: F

 Tube OD from 4 to 12 mm
 manufactured from profile material

Référence de commande: F

 Tube ø ext. 4 à 12 mm =
 matériau profile

| Rohr AD pipe OD Tube Ø ext. | PN | S ₁ | S ₂ | L ₂ | L ₁ | kg für % ST kg for % pc. kg en % | Bestellzeichen order code Réf. cde |
|-----------------------------------|---------------|----------------|----------------|----------------|----------------|--|--|
| 4 | LL | 10 | 9 | 21 | 11 | 2,5 | F 4-LL |
| 6 | 100 [400] | 12 | 11 | 21 | 9,5 | 2,8 | F 6-LL |
| 8 | | 14 | 12 | 23 | 11,5 | 3,8 | F 8-LL |
| 6 | L | 14 | 12 | 27 | 12 | 4,9 | F 6-L |
| 8 | 500 [2200] | 17 | 14 | 29 | 14 | 7,6 | F 8-L |
| 10 | | 19 | 17 | 30 | 15 | 9,6 | F 10-L |
| 12 | | 22 | 19 | 32 | 17 | 13,5 | F 12-L |
| 15 | 400 [1700] | 27 | 19 | 36 | 21 | 15,8 | F 15-L |
| 18 | | 32 | 24 | 40 | 23,5 | 23,9 | F 18-L |
| 22 | | 36 | 27 | 44 | 27,5 | 31,7 | F 22-L |
| 28 | 250 [1100] | 41 | 36 | 47 | 30,5 | 42,0 | F 28-L |
| 35 | | 50 | 41 | 56 | 34,5 | 75,9 | F 35-L |
| 42 | | 60 | 50 | 63 | 40 | 107,8 | F 42-L |
| 6 | S | 17 | 14 | 31 | 16 | 8,5 | F 6-S |
| 8 | 800 [3400] | 19 | 17 | 32 | 17 | 11,7 | F 8-S |
| 10 | | 22 | 19 | 34 | 17,5 | 16,1 | F 10-S |
| 12 | | 24 | 22 | 38 | 21,5 | 20,5 | F 12-S |
| 14 | 630 [2700] | 27 | 19 | 40 | 22 | 20,7 | F 14-S |
| 16 | | 30 | 24 | 43 | 24,5 | 25,0 | F 16-S |
| 20 | | 36 | 27 | 48 | 26,5 | 40,7 | F 20-S |
| 25 | | 46 | 36 | 54 | 30 | 77,6 | F 25-S |
| 30 | 400 [1700] | 50 | 41 | 62 | 35,5 | 97,4 | F 30-S |
| 38 | | 60 | 50 | 72 | 41 | 131,8 | F 38-S |

 Hinweise zu Druck- und Temperaturangaben siehe Seiten I/9 + I/10 / Hints concerning pressure-information - see I/9 + I/10 / Informations sur les pressions - voir I/9 + I/10
 L₂ = Ungefährmaß bei angezogener Mutter / L₂ = approximate length with nut tightened / L₂ = longueur approximative, l'écrou étant bloqué