



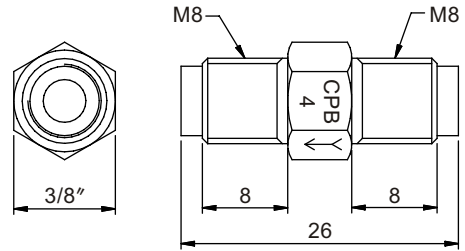


Proportion Adapters


Proportion Adapters

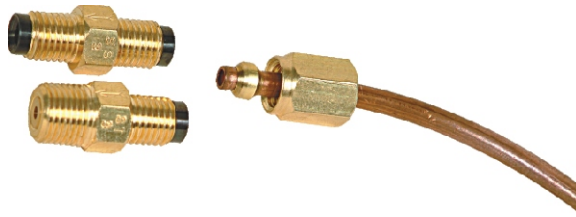

CPV/CPB/SS

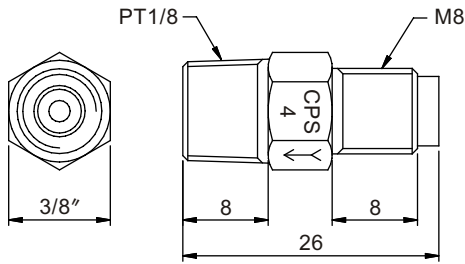

CPT/CPS/ST

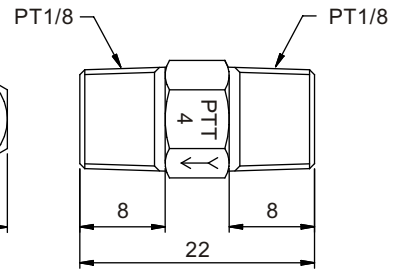

PTT

Specification	Bore	Code					Outer-thread	Weight (g)
For Grease NLGI grades 0~000	CPS	1	2	3	4	5	M8xPT1/8	10
	CPB						M8xM8	9

Code				
1	2	3	4	5
Flow Rate				
1	2	4	8	16

Specification	Bore	Code					Outer-thread	Weight (g)
1. One way flow with reverse stopper 2. For larger and small Volume 3. For Oil	PTT	1	2	3	4	5	PT1/8xPT1/8	10
	CPT						M8xPT1/8	10
	CPV						M8xM8	9

Code				
1	2	3	4	5
Flow Rate				
1	2	4	8	16

Specification	Bore	Code						Outer-thread	Weight (g)
1. One way flow with reverse stopper 2. For larger Volume 3. For Oil	ST	0	1	2	3	4	5	M8xPT1/8	9
	SS							M8xM8	8

Code					
0	1	2	3	4	5
Flow Rate					
2	4	8	16	32	64

Specification	Bore	Code					Outer-thread	Weight (g)
1. One way flow with reverse stopper 2. For Oil	BTT	0	2/0	3/0	4/0	5/0	UNF 5/16x5/16	10
	BPT						BSP x UNF 1/8x5/16	10

Code				
0	2/0	3/0	4/0	5/0
Flow Rate (drop/min)				
22-29	14-20	7-12	4-6	1-3