

中止閥



Needle Valve

- ST系列：最高使用壓力210。
- GCT系列：最高使用壓力350。
- SB系列：壓力計緩衝器 Gauge Damper。





型式 Type	口徑 PT	A (mm)	B (mm)	H (mm)	流量 Flow (L/min)	最高壓力 Max. Pressure (kgf/cm ²)	重量 Weight (kg)
ST-02	1/4"	52.5	26	95.5	3	210	0.35
ST-02L (90°)	1/4"	44.5	26	109	3	210	0.39
ST-03	3/8"	52.5	26	95.5	21	210	0.34
ST-03L (90°)	3/8"	44.5	26	109	21	210	0.38
GCT-02	1/4"	52.5	22	91	3	350	0.33
GCT-03	3/8"	52.5	22	91	21	350	0.31
GCT-04	1/2"	62	32	114	30	350	0.67
GCT-06	3/4"	90	38	148	100	350	1.30
GCT-08	1"	102	50	164	300	350	2.33
SB-02	1/4"	43	21	32	0.5	70	0.10
SB-03	3/8"	45	23	34	0.7	70	0.12

注油器 (加油口)



Filler Breather Filters

- 裝置於油箱上方，做為注油過濾和空氣呼吸器的功能。

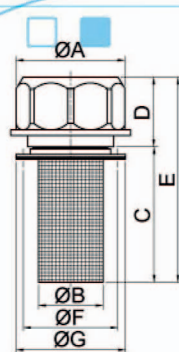

型式 Type	口徑 (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	d x 孔數 Hole	重量 Weight (kg)
SP-06	32	53	31	65	34	99	45.5	53	Ø6 x 3 孔	0.09
SP-06 (S)	32	53	31	65	34	99	45.5	53	Ø6 x 3 孔	0.09
SY-08	50	80	48	95	50	147	71	82	Ø6 x 6 孔	0.26
SY-08 (S)	50	80	48	95	50	147	71	82	Ø6 x 6 孔	0.26
SY-10	50	80	49	150	52	187	78	88	Ø6 x 4 孔	0.30
CB-16 直口	53	85	46	120	38	158	For Tank Side Using / Welding (焊接式)		0.60	
CB-16 斜口	53	85	46	120	38	158			0.61	